

Santoprene™ R² TPV 9101-80E100

Sales development tool

External




Lips: High elasticity

Skin/lip: Medium elasticity


Foot: Low elasticity

Metal frame

Channel Mounted (ChM)

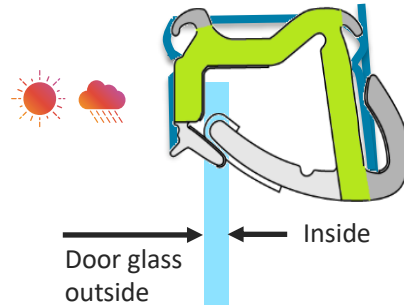

Frame under Glass (FuG)

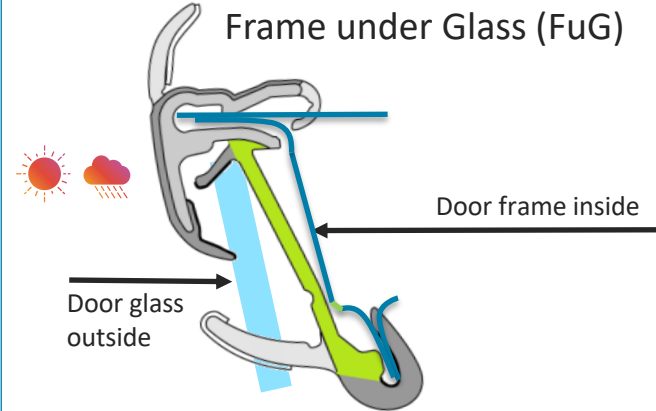

Function

- Basic sealing
 - with noise and
 - vibration reduction

Material requirements

- Elasticity
- UV and aging requirements
- Abrasion resistance

Complexity

- 2-3 materials needed

- Advanced sealing performance + roof seal
 - advanced noise and vibration reduction
- Provide surface aesthetics

- Better elasticity
- Higher UV and aging requirements
- Abrasion resistance

- 4-5 materials needed


Source: Company

Santoprene™ R² TPV 9101-80E100

executive summary

Product Positioning

	121-73W175	9101-80E100
Brand	Santoprene	Santoprene
Targeted segment(s)	GRC lip, foot	GRC foot
OEM Spec – GRC foot	Pass	Pass
UV	+	N/A
Compression Set	+	0

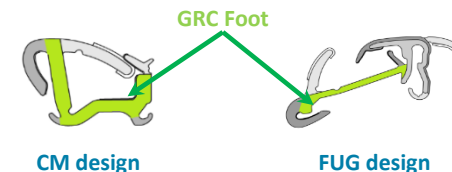

Development objective:

Develop a cost optimized glass run channel (GRC) “foot grade” solution while meeting the functional requirements of the market (Fit-for-Purpose)

Key targeted benefits:


- Offer GRC system cost savings by optimized cost product
- Balanced properties – Hardness, Modulus, and Compression set, meeting functional requirements
- Further improves sustainability value of Santoprene – incorporates at least 15% PCR (post-consumer recycled) material

Santoprene™ R² TPV 9101-80E100 delivers competitive physical performance

Physical property	Test method* based on	Units	9101-80E100	9101-80E	121-73W175
Specific Gravity	ASTM D792	-	0.976	0.984	0.976
Shore A Hardness	ASTM D2240	Shore A	82	81	78
Modulus, 25%	ASTM D412	MPa	2.8	2.7	2.3
Modulus, 100%	ASTM D412	MPa	3.8	3.7	3.8
Tensile strength at break	ASTM D412	MPa	7.6	6.3	7.6
Elongation at break	ASTM D412	%	495	526	348
Tear strength	ASTM D624	N/cm	314	274	361
Compression set, RT 22h at 25% strain	ASTM D395B	%	30	34	25
Compression set, 70°C 22h at 25% strain	ASTM D395B	%	34	46	28
Compression set, 110°C 22h at 25% strain	ASTM D395B	%	47	55	39
Compression set, 125°C 70h at 25% strain	ASTM D395B	%	56	65	49
LCR App Viscosity, 204C	TPE-0200	Pa.s @ 200s ⁻¹	331	353	350
	TPE-0200	Pa.s @ 1200s ⁻¹	89	92	88

*Where applicable, test results based on fan gated, 2.0 mm injection molded plaques. Tensile strength, elongation and tensile stress are measured across the flow direction. Test results are generated by ExxonMobil test methods that may not fully conform to the ASTM and/or ISO methods. Test methods are available upon request


Santoprene™ R² TPV 9101-80E100 delivers good short-term heat aging performance

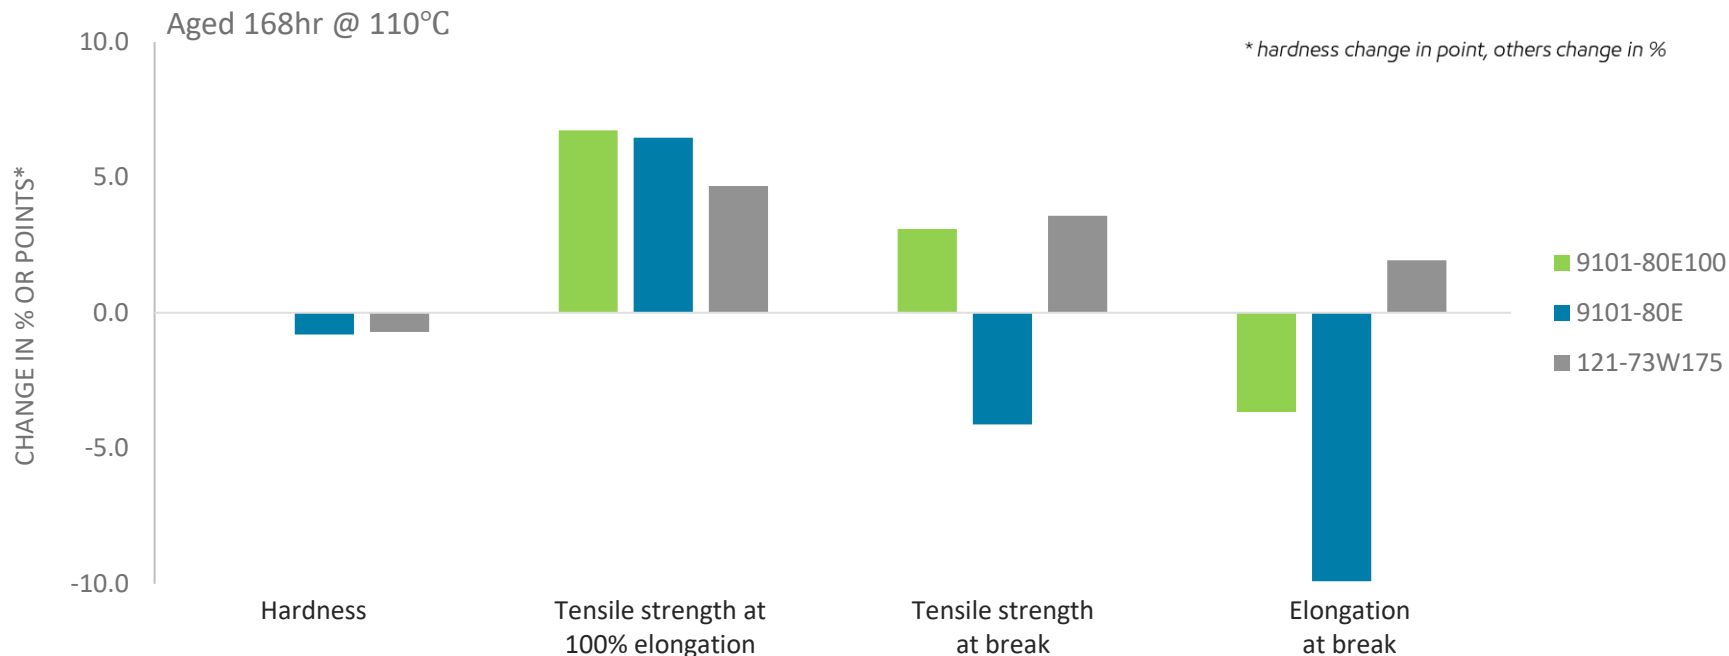

*Where applicable, test results based on fan gated, 2.0 mm injection molded plaques. Tensile strength, elongation and tensile stress are measured across the flow direction. Test results are generated by ExxonMobil test methods that may not fully conform to the ASTM and/or ISO methods. Test methods are available upon request

Hardness test based on ASTM D2240
Tensile test based on ASTM D412


Santoprene™ R² TPV 9101-80E100 delivers good long-term heat aging performance

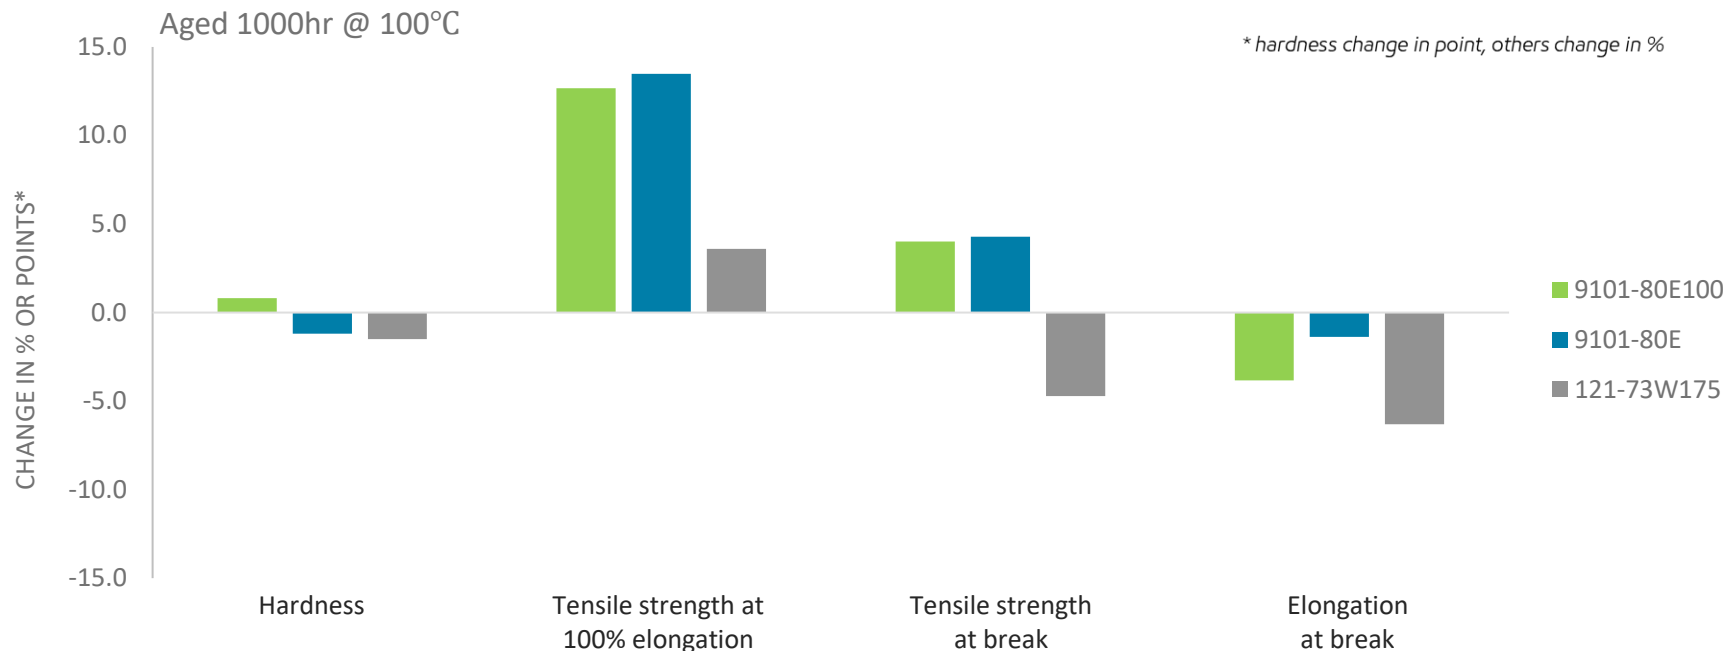

*Where applicable, test results based on fan gated, 2.0 mm injection molded plaques. Tensile strength, elongation and tensile stress are measured across the flow direction. Test results are generated by ExxonMobil test methods that may not fully conform to the ASTM and/or ISO methods. Test methods are available upon request

Hardness test based on ASTM D2240
Tensile test based on ASTM D412


Santoprene™ R² TPV 9101-80E100 shows superior extrusion part finish

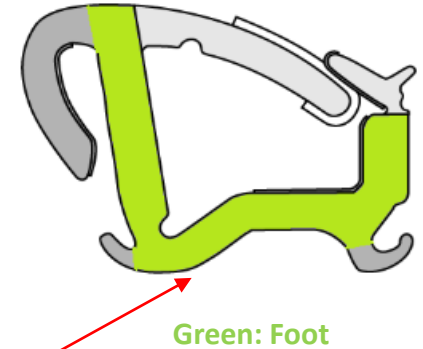

Good processability material

Santoprene™ R² TPV 9101-80E100 demonstrates low shrinkage

Shrinkage in MD

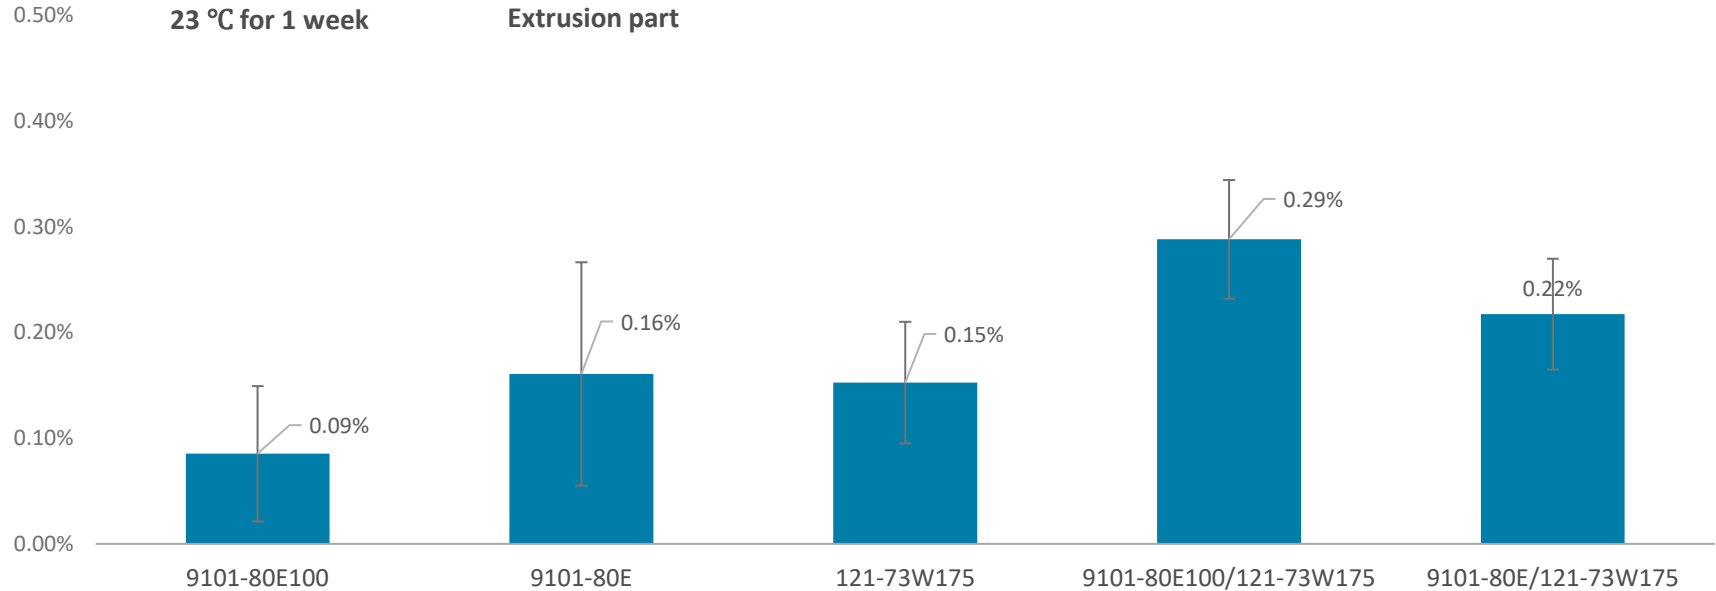


Low shrinkage meet GRC requirement


Company method

Santoprene™ R² TPV 9101-80E100 provides good bonding performance

Bonding Strength with 121-73W175, MPa

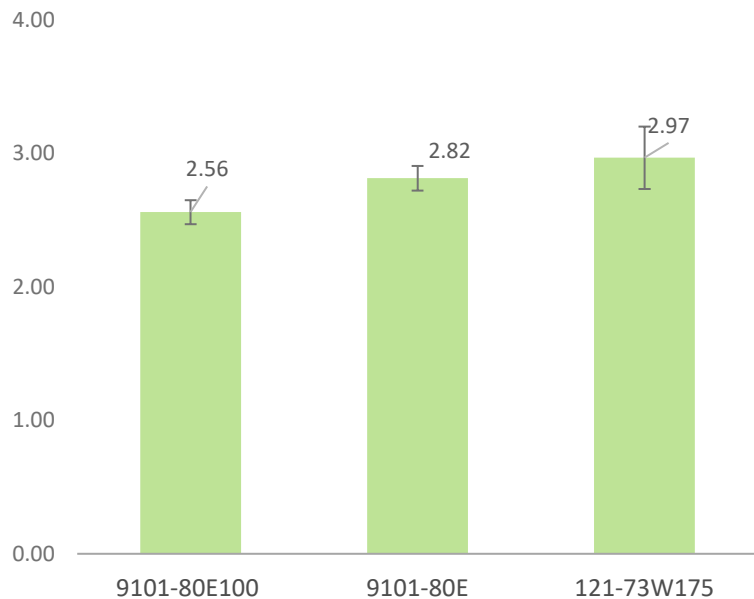

Bonding Strength with 121-80B200, MPa

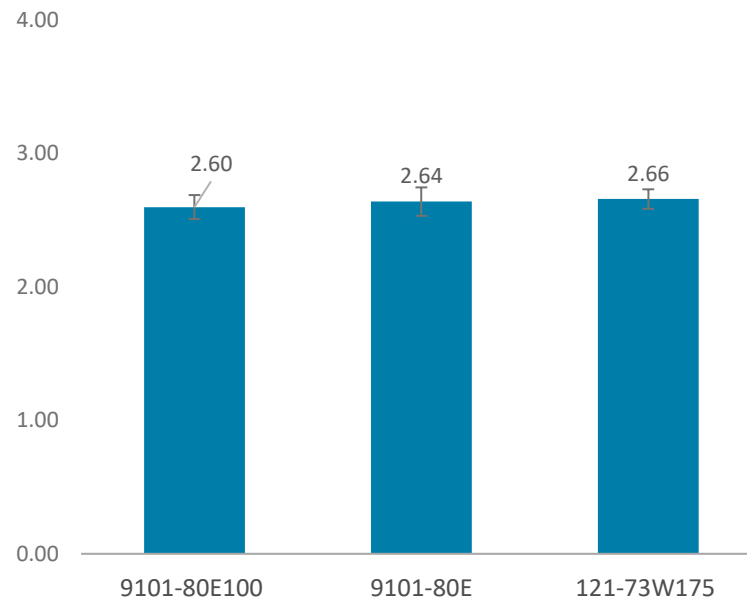



Good bonding performance to GRC lip and Corner molding

Company method

Santoprene™ R² TPV 9101-80E100 shows excellent foaming ability

Density, g/cm³

Foaming

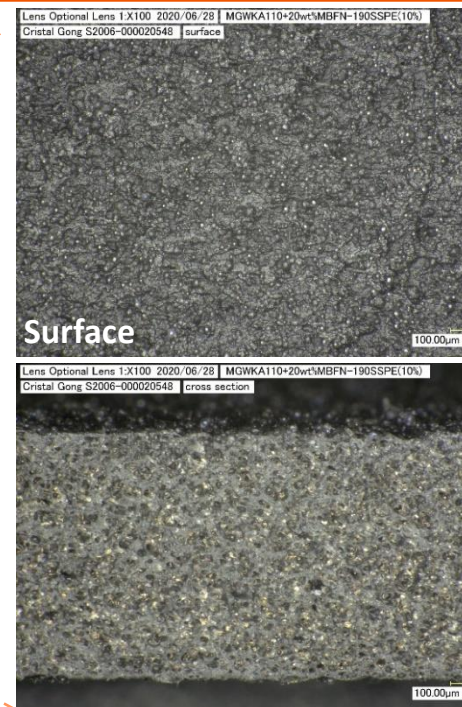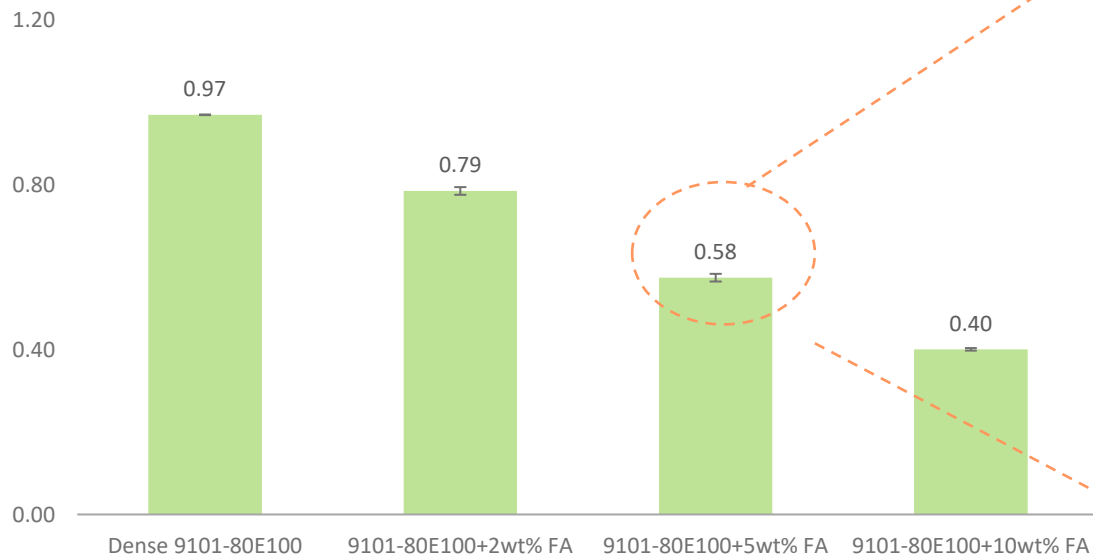

Good surface appearance and stable dimensional consistency

Company method

Santoprene™ R² TPV 9101-80E100 shows sustainability value

New Santoprene™ R² TPV 9101-80E100 incorporates

at least **15%** Post-Consumer Recycled (PCR) content

Higher content options feasible depending on customer's needs

Valuable use of plastic waste

Helps OEMs meet recycled content goals



▶ Safety of operations

- Refer to detailed information related to safe handling of Santoprene™ TPV in MSDS available on dedicated website (www.santoprene.com)

▶ Dry 9101-80E100 before using to avoid surface defects, surging/low melt strength, irregular edges, etc.

- Desiccant circulating air drying
- 80 °C for 3 hours
- Moisture content < 0.08%
- For regrind– extended drying time
- For colorant – separate drying

	Temperature, °C
Zone 1	165 – 170
Zone 2	170 – 200
Zone 3	175 – 205
Zone 4	180 – 210
Head	185 – 215
Die	190 – 220
Melt	190 – 210

▶ Clean resin residues from die/head/screw before start-up

▶ Set barrel and die temperatures (see recommendations in Table)

▶ Start extruder with low screw speed until material exits die

▶ Higher screw rpm and temperature recommended to troubleshoot edge-tear, surface appearance etc

▶ Lower temperatures, quicker cooling, support calibrators etc recommended for higher melt strength/lower sagging after die

▶ Cooling: water spray and/or immersion should be used

- ▶ Offer GRC system cost savings by optimized cost product
- ▶ Balanced properties – Hardness, Modulus, and Compression set, meeting functional requirements
- ▶ Further improves sustainability value proposition of Santoprene – incorporates at least 15% PCR (post-consumer recycled) material

Thank you

www.santoprene.com

Disclaimer Slides for External Presentations

External



Legal Disclaimer

Disclaimer & Notice to Users

This publication was printed based on Celanese's present state of knowledge, and Celanese undertakes no obligation to update it. Because conditions of product use are outside Celanese's control, Celanese makes no warranties, express or implied, and assumes no liability in connection with any use of this information. Nothing herein is intended as a license to operate under or a recommendation to infringe any patents.

Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colorants or other additives may cause significant variations in data values. Properties of molded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use.

To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only.

The products mentioned herein are not intended for use in medical or dental implants.

Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates.

© 2021 Celanese or its affiliates. All rights reserved.

Contact Information

Americas

8040 Dixie Highway, Florence, KY 41042 USA

Product Information Service

t: +1-800-833-4882 t: +1-859-372-3244

Customer Service

t: +1-800-526-4960 t: +1-859-372-3214

e: info-engineeredmaterials-am@celanese.com

Europe

Am Unisys-Park 1, 65843 Sulzbach, Germany

Product Information Service

t: +(00)-800-86427-531 t: +49-(0)-69-45009-1011

e: info-engineeredmaterials-eu@celanese.com

Asia

4560 Jinke Road, Zhang Jiang Hi Tech Park

Shanghai 201203 PRC

Customer Service

t: +86 21 3861 9266 f: +86 21 3861 9599

e: info-engineeredmaterials-asia@celanese.com

Disclaimer

This publication was printed based on Celanese's present state of knowledge, and Celanese undertakes no obligation to update it. Because conditions of product use are outside Celanese's control, Celanese makes no warranties, express or implied, and assumes no liability in connection with any use of this information. Nothing herein is intended as a license to operate under or a recommendation to infringe any patents.

Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates.

Copyright © 2021 Celanese or its affiliates.
All rights reserved.

Contact Information

Americas

8040 Dixie Highway, Florence, KY 41042 USA
Product Information Service

t: +1-800-833-4882 t: +1-859-372-3244

Customer Service

t: +1-800-526-4960 t: +1-859-372-3214

e: info-engineeredmaterials-am@celanese.com

Europe

Am Unisys-Park 1, 65843 Sulzbach, Germany
Product Information Service

t: +(00)-800-86427-531 t: +49-(0)-69-45009-1011

e: info-engineeredmaterials-eu@celanese.com

Asia

4560 Jinke Road, Zhang Jiang Hi Tech Park
Shanghai 201203 PRC

Customer Service

t: +86 21 3861 9266 f: +86 21 3861 9599

e: info-engineeredmaterials-asia@celanese.com